



ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025:2006 and
EN 15804:2012+A2:2019/AC:2021 for:

Rigips® RFI (DFH2) 15mm FIRE & MOISTURE RESISTENT PLASTERBOARD



INTERNATIONAL EPD SYSTEM

The International EPD® System
Programme operator: EPD international AB
Registration number:
EPD-IES: 0031093:001




An EPD may be updated or depublished if conditions
change. To be find the lates version of the EPD and to
confirm its validity, see www.environdec.com

Version 01

Version date: 2026/04/14

Validity: 5 years

Validity date: 2031/04/13

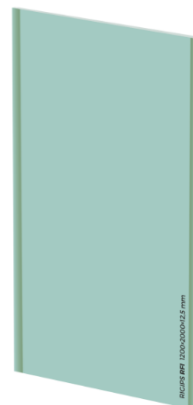

EPD Owner : Saint-Gobain Hungary Kft

General information

Programme information

PROGRAMME:	The International EPD® System
ADRESS:	EPD International AB - Box 210 60 - SE-100 31 Stockholm - Sweden
WEBSITE:	www.environdec.com
E-MAIL:	support@environdec.com

PCR information

Product Category rules (PCR)
CEN standard EN 15804:2012+A2:2019/AC:2021 as the Core Product Category Rules (PCR)
Product category rules (PCR): PCR 2019:14 Construction Products, version 2.0.1
Complementary PCR: (c-PCR-031), 2024-08-06. c-PCR Gypsum-based construction products
PCR review was conducted by: The Technical Committee of the International EPD® System See www.environdec.com for a list of members.
Chairs of the PCR review: Rob Rouwette (chair), Noa Meron (co-chair).

Verification

External and independent ('third-party') verification of the declaration and data, according to ISO 14025:2006, via

EPD verification through:

- ☒ Individual EPD verification without a pre-verified LCA/EPD tool
- ☐ Individual EPD verification with a pre-verified LCA/EPD tool
- ☐ EPD process certification* without a pre-verified LCA/EPD tool
- ☐ EPD process certification* with a pre-verified LCA/EPD tool
- ☐ Fully pre-verified EPD tool

Independent third-party verification of the declaration and data, according to ISO 14025:2006:

- ☒ EPD verification by individual verifier

Third party verifier: prof. Ing. Silvia Vilčeková, PhD., Silcert, s.r.o.

tel.:+421907993033, Company: Silcert, s.r.o

Approved by: The International EPD© System

Procedure for follow-up of data during EPD validity involves third part verifier: ☐ Yes ☒ No

Ownership and limitations on use of EPD

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but published in different EPD programmes, may not be comparable. For two EPDs to be comparable, they shall be based on the same PCR (including the same first-digit version number) or be based on fully aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have identical scope in terms of included life-cycle stages (unless the excluded life-cycle stage is demonstrated to be insignificant); apply identical impact assessment methods (including the same version of characterization factors); and be valid at the time of comparison.

Information about EPD owner

Address and contact information of the EPD owner: Saint-Gobain Hungary Kft., 2085 Pilisvörösvár, Bécsi út 07/5 hrsz, Hungary

Description of the organization of the EPD owner:

The group has been represented in Hungary since 1992, currently operating under the name Saint-Gobain Hungary Kft. with three brand names (Isover, Rigips, Weber), and other members of the group include Saint-Gobain Sekurit, which specializes in the sale of automotive glass, and Saint-Gobain Abrasives, which produces and sells abrasives, as well as Saint-Gobain PAM (pipeline systems) and Saint-Gobain Glass (glass-based solutions).

Saint-Gobain's strategy "We grow while changing the world around us for the better." And for that Saint-Gobain develop, manufacture and market materials for industry that improve the quality of life while protecting the environment

Management system-related certification: ISO 14001, ISO 45001, ISO 50001

LCA practitioner: Laszlo Karafa (laszlo.karafa@saint-gobain.com), Ana-Maria Dumitru (ana-maria.dumitru@saint-gobain.com)

Communication: The intended use of this EPD is for B2B communication.

Product information

Product name: Rigips® PRO RFI (DFH2) 15mm

Visual representation of the product:

UN CPC CODE: 37530 Articles of plaster or of composition based on plaster

Manufacturing site(s): MÁTRA, Saint-Gobain Hungary Kft., Plasterboard Plant, 3273, Halmajugra, Külterület, 047/3 hrsz



Product description

Rigips® RFI (DFH2) 15mm fire and moisture resistant, type DFH2 plasterboard conforming to the requirements of EN 520:2004+A1:2009 standard and comes with tapered edge on the long edges and has short edges sawn straight. This plasterboard is suitable for dry lining internal surfaces and for constructing partitions, part of solutions for modern buildings providing moisture, fire, sound, thermal and impact resistance together with superbly smooth surfaces to create contemporary internal environments. The high-performance linings for walls and ceilings, partitions deliver comfort and safety for all occupants.

For more information: <https://www.rigips.hu/termek/gipszkartonok-es-epitolemezek/tuzgatló-impregnált-gipszkarton-epitolemez-rfi#leiras>

Technical data/physical characteristics:

Parameter	Value / Description
EN Classification	DFH2
Reaction to fire	A2-s1, d0
Water vapour resistance factor, μ	10
Thermal conductivity	0,25 W/m*K (EN 520:2004+A1:2009)

Application	Value / Description
Intended use and key functionalities	building space-delimiting structures

Expected influence on the operational aspects and impact of the building or other construction work

Rigips® RFI 15 mm fire & moisture resistant plasterboard, suitable for dry lining internal surfaces and for constructing partitions. Rigips plasterboards are part of solutions for modern buildings providing moisture, fire, sound, thermal and impact resistance together with superbly smooth surfaces to create contemporary internal environments.

Restrictions to a type of construction or building No restriction

Lifespan 50 years

Content declaration

Description of the main components and/or materials:

Quantity for 1 declared unit 12.18 kg of finished product

Product components	Mass (kg)	Post-consumer recycled material, mass-% of product	Biogenic material, mass-% of product	Biogenic material, kg C/product or declared unit
Core (gypsum and additives)	11.84	0.0%	0.3%	0.01
Liner & facing	0.34118521	2.6%	2.6%	0.14
Sum	100%	3%	3%	0.15
Packaging materials	Mass (kg)	Mass-% (versus the product)	Biogenic material, kg C/product or declared unit	
Paper label	0.0025	0%	0.001075	
Wooden pallet	0.161413	1%	0.06617933	

Hazardous substances

At the date of issue of this declaration, there is no “Substance of Very High Concern” (SVHC) in concentration above 0.1% by weight, and neither do their packaging, following the European REACH regulation (Registration, Evaluation, Authorization and Restriction of Chemicals).

LCA information

TYPE OF EPD	Cradle to grave and module D
DECLARED UNIT	1 m ² of installed board
CONVERSION FACTOR TO MASS	Density = 812 kg/m ³ Thickness = 15 mm
SYSTEM BOUNDARIES	A1-A3, A4-A5, B1-B7 and module D.
REFERENCE SERVICE LIFE (RSL)	The Reference Service Life (RSL) of the Gypsum product is 50 years. This 50-year value is the amount of time that we recommend our products last for without refurbishment and corresponds to standard building design life.
CUT-OFF RULES	All data is available, no cut-off rules has been applied. In the case that there is not enough information, the process energy and materials representing less than 1% of the whole energy and mass used can be excluded (if they do not cause significant impacts). The addition of all the inputs and outputs excluded cannot be bigger than the 5% of the whole mass and energy used, as well of the emissions to environment occurred. Flows related to human activities such as employee transport are excluded. The construction of plants, production of machines and transportation systems are excluded since the related flows are supposed to be negligible compared to the production of the building product when compared at these systems lifetime level.
ALLOCATIONS	Allocation has been avoided when possible and when not possible a mass allocation has been applied. The polluter pays and the modularity principles as well have been followed. Allocation of materials for recycling: - Post-consumer: When a flow enters the manufacturing process (A1-A3), it is treated with waste allocation (as defined in EN15804+A2). All the steps after its "End of Waste" status are quantified. The incoming flow contributes to module D and Secondary Materials indicator. - Pre-consumer: When a flow enters the manufacturing process (A1-A3), it is considered as an incoming coproduct that bears a fraction of the impact of the original manufacturing process where it was generated (which might be 0, e.g. in case of an economic allocation with a negligible (<1%) economic value). The incoming flow does not contribute to module D nor Secondary Materials indicator.
DATA QUALITY ASSESSMENT	Data quality of primary and secondary data had been judged by its precision (measured, calculated, or estimated), completeness (e.g., unreported emissions), consistency (degree of uniformity of the methodology applied), and representativeness (geographical, technological, and temporal).
GEOGRAPHICAL COVERAGE AND TIME PERIOD	Scope: Europe Data is collected from one production site Saint-Gobain Hungary Kft. Plasterboard Plant, MÁTRA, located in Hungary Data collected for the year 2025
BACKGROUND DATA SOURCE	Databases from Sphera CUP2024.2 and ecoinvent v.3.10 EF Package 3.1
SOFTWARE	Sphera LCA for experts 10

Data quality declaration

Data quality information according to EN 15941					
Data collection	Data collection period 2025-01-01 to 2025-12-31				
Sites used	Saint-Gobain Hungary Kft. Plasterboard Plant, MÁTRA,3273 Halmajugra, Kűlterület, 047/3 hrsz				
Geography	Produce in: Hungary Sold in: Hungary Use and disposal in: Hungary				
Technology	Rigips gypsum plasterboards are manufactured in a highly automated continuous process. Gypsum is calcinated and become stucco. Mixed stucco with additives & water it is spread on a paper liner, then covered with a second paper liner (sandwich principle). Then obtain product it is dried into an oven, resized and packed.				
Averaging	100% of production				
LCI/LCA database	Sphera CUP2024.2 and ecoinvent v.3.10				
EPD used	EPD specific: PCE dispersion & PNS dispersion				
Data Quality Scheme	EN 15804 :2012+A2:2019, Annex E, Table E.2				
Use of fair data with more than 30% of a core impact	None				
Use of Poor relevant data	None				
Use of very poor relevant data	No very poor data used				
Process	Source type	Source	Reference year	Data category	A1-A3 GWP-GHG [kg CO2 eq.]
Manufacturing process					
Thermal energy	Database	Sphera 2024.2	<5 years old	Primary data	61.91%
Electricity	Database	Sphera 2024.2 /ecoinvent 3.10	<5 years old	Primary data	0.46%
RMs from EPD					
EPD specific RM1	EPD	EPD number	EPD publication year	Primary data, secondary data	0.88%
EPD specific RM2	EPD	EPD number	EPD publication year	Primary data, secondary data	0.00%
Background datasets in A1-A3					
Other processes	0.00%	0.00%	0.00%	0.00%	0.00%
Total share of primary data					63.26%

A1-A3 GWP-GHG


2.68E+00

Description of system boundaries

System boundaries (X=included. MND=module not declared)

	PRODUCT STAGE			CONSTRUCTION STAGE	USE STAGE								END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE SYSTEM BOUNDARY
	Raw material supply	Transport	Manufacturing	Transport	Construction-Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-recovery
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	EU	EU	HU	HU	HU	-	-	-	-	-	-	-	HU	HU	HU	HU	-

System boundaries when the end-of-waste state is reached:

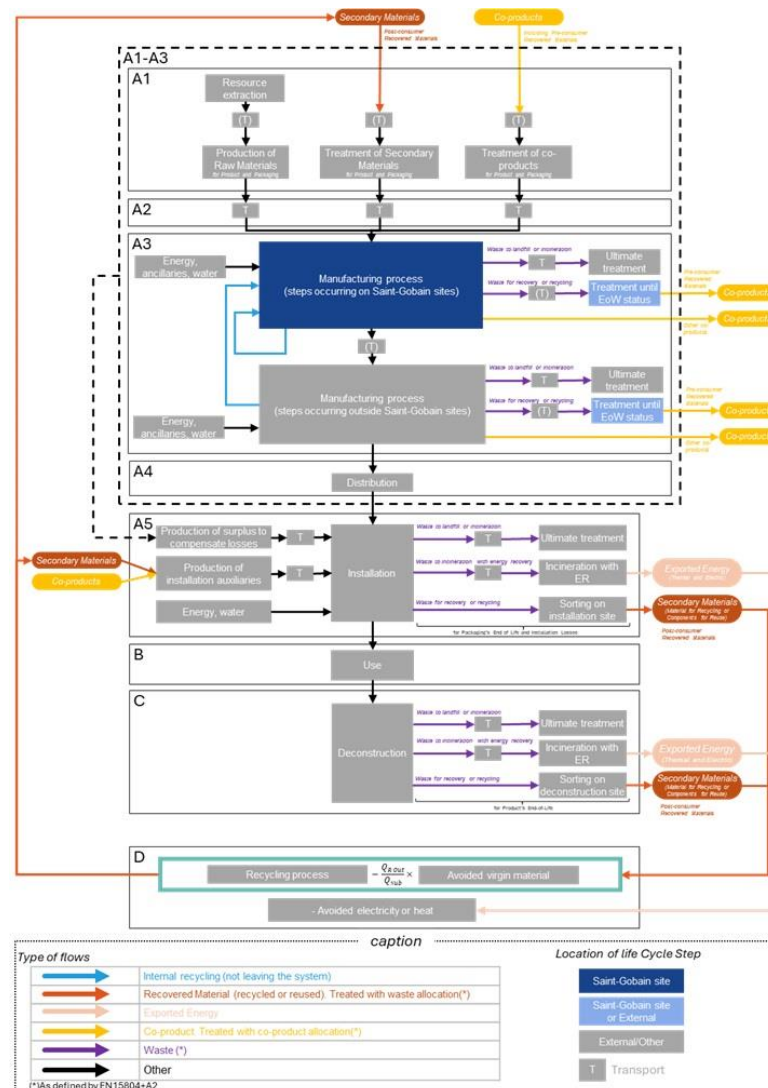

Life cycle stages

A1-A3. Product stage

The product stage of plaster products is subdivided into 3 modules A1, A2 and A3 respectively “raw material supply”, “transport to manufacturer” and “manufacturing”.

A1. Raw materials supply

This module includes the extraction and transformation of raw materials.


A2. Transport to the manufacturer

This module includes the transportation of raw materials and packaging to the manufacturing site. The modelling includes road, boat and train transportation.

A3. Manufacturing

This module includes the manufacture of products and the manufacture of packaging. The production of packaging material is considered at this stage. The processing of any waste arising from this stage is also included.

Manufacturing process flow diagram

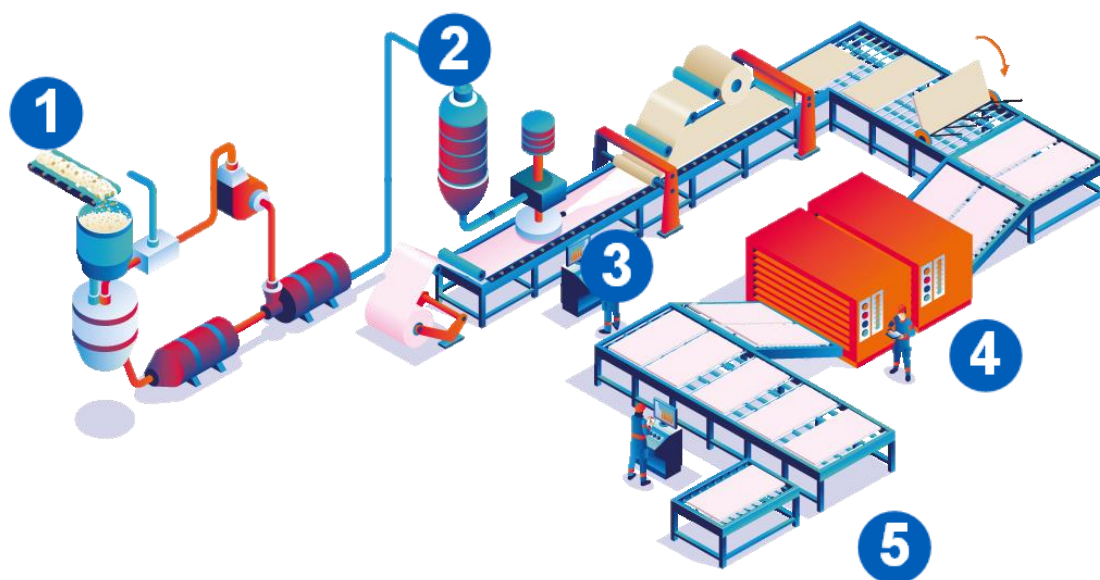

1. **Calcination.** Gypsum is ground then **heated to 160°C to be dehydrated**. The powder obtained (stucco), stored in silos, feeds the production of plasterboard.
2. **Mixing.** The stucco powder is mixed with **water and additives** to **obtain a slurry**. The dosages are adjusted according to the desired properties of the finished product, such as fire resist.
3. **Forming.** The slurry is **spread on a paper liner** as a support, then a second paper liner is placed on the top. After a quick setting, the boards are **precut**.
4. **Drying.** The boards pass through a dryer where the temperature can reach up to 300°C. The evaporation of excess water **strengthens the cohesion of the gypsum** to the paper liner.
5. **Finishing and packaging.** The plasterboards are **resized, inspected then packed** before being stored by AGVs.

A4-A5. Construction process stage

The construction process is divided into 2 modules: A4, Transport to the building site and A5, Installation in the building.

A4. Transport to the building site

This module includes transport from the production gate to the building site. Transport is calculated based on a scenario with the parameters described in the following table.

Parameter	Value / Description
Fuel type and consumption of vehicle or vehicle type used for transport e.g., long-distance truck, boat, etc.	Freight truck, maximum load weight of 27 t, real load is 24 t and consumption of 0.38 liters per km
Distance	222 km
Capacity utilisation (including empty returns)	76% (30% empty returns)
Bulk density of transported products*	818 kg/m ³
Volume capacity utilisation factor	1 (by default)

A5. Installation in the building

This module includes: the installation of the product, the surplus of raw materials and packaging (cradle to gate) to compensate for the loss of product during the installation, the transport and management of packaging and product waste.

Parameter	Value / Description
Ancillary materials for installation (specified by materials)	Jointing compound: 0.330 kg/m ² Jointing tape: 1.23 m/m ² board (0.004 kg/m ²) Screws: 11 units/m ² board (0.010 kg/m ²)
Water for on-site mixing of jointing compound	0.165 liters/m ²
Other resource use	None
Electricity for on-site mixing of jointing compound	0.001 MJ/m ²
Scrap rate at installation	2% for plasterboard and for ancillary materials 100% for packaging
Wastage of materials on the building site before waste processing, generated by the product's installation (specified by type)	Plasterboard: 12.18kg/m ² Jointing Compound: 0.33 kg/m ² Jointing Tape: 0.004kg/m ² Packaging: 0.164 kg/m ²
Transport of packaging waste	Landfill: 50 km Recycling: 50 km Landfill for 1m ² : Plasterboard: 12.18kg/m ²
Output materials (specified by type) as results of waste processing at the building site e.g., of collection for recycling, for energy recovering, disposal (specified by route)	Jointing Compound: 0.33 kg/m ² Jointing Tape: 0.004kg/m ² Wooden pallet: 0.0178kg Paper label: 0.003 kg Reuse: Wooden pallet: 0.143kg
Direct emissions to ambient air, soil, and water	None

B1-B7. Use stage (excluding potential savings)

The use stage is divided into the following modules:

- **B1:** Use
- **B2:** Maintenance
- **B3:** Repair
- **B4:** Replacement
- **B5:** Refurbishment
- **B6:** Operational energy use
- **B7:** Operational water use

The product has a reference service life of 50 years. This assumes that the product will last in situ with no requirements for maintenance, repair, replacement, or refurbishment throughout this period. Therefore, it has no impact at this stage.

C1-C4. End of Life Stage

This stage includes the next modules:

- **C1: Deconstruction, demolition.** The de-construction and/or dismantling of the product take part of the demolition of entire building. The energy considered for demolition is 0.045 MJ/m².
- **C2: Transport to waste processing**
- **C3: Waste processing for reuse, recovery and/or recycling**
- **C4: Waste disposal**, including physical pre-treatment and site management.

Description of the scenarios and additional technical information for the end of life:

Parameter	Value / Description
Collection process specified by type	12.18 kg of plasterboard including paper liner is collected with mixed deconstruction and demolition waste 12.18 kg landfill Other deconstruction waste, such as ancillaries used for installation, is 100% collected with mixed deconstruction and demolition waste for landfill
Recovery system specified by type	0 kg recycled
Disposal specified by type	12.18 kg to landfill
Assumptions for scenario development (e.g. transportation)	The waste will be transported by truck with 24 t payload, using diesel as a fuel consuming 38 liters per 100 km Transport distance to landfill: 80 km Transport distance to recycling: 80 km

D. Reuse/recovery/recycling potential

In the module D is declared the environmental benefits and loads from reusable products, recyclable materials, or energy recovery. Module D considers:

- Inputs of secondary materials: recycled raw materials for product and packaging (pre- and post-consumer),
- Outputs of secondary materials: product and/or packaging sent to recycling,
- Exported energy (electric or thermal): product and/or packaging sent to incineration with energy recovery.

Environmental performance

As specified in EN 15804:2012+A2:2019/AC:2021 and the Product-Category Rules, the environmental impacts are declared and reported using the baseline characterization factors based on EF 3.1. Raw materials and energy consumption, as well as transport distances have been taken directly from the manufacturing plant.

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

The results of the end-of-life stage (modules C1-C4) should be considered when using the results of the product stage (modules A1-A3).

Disclaimer 1: The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the following indicators:

- Resource use, mineral and metals [kg Sb eq.]
- Resource use, energy carriers [MJ]
- Water deprivation potential [m³ world equiv.]
- Land use [Pt]
- Human toxicity (cancer) [CTUh]
- Human toxicity(noncancer) [CTUh]
- Ecotoxicity (freshwater [CTUe]

Disclaimer 2: The impact category Ionizing radiation, human health [kBq U235 eq.] deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction material is also not measured by this indicator.

Disclaimer 3: The assumptions for the modules are in accordance with the project report (LCA study).

The following non-mandatory additional environmental indicators are not declared:

- Ecotoxicity freshwater [CTUe]
- Particulate Matter emissions [Disease incidence]
- Cancer human health effects [CTUh]
- Ionizing radiation - human health [kBq U235 eq.]
- Non-cancer human health effects [CTUh]
- Land Use [Pt].

Results refer to a declared unit of 1m² of installed gypsum board 15 mm with a weight of 12.18 kg/m². The following results refer to a single product manufactured in a single plant.

Environmental Impacts

		PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE LIFE CYCLE
Environmental indicators		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	Climate Change [kg CO2 eq.]	1.88E+00	2.20E-01	3.68E-01	0	0	0	0	0	0	0	5.02E-02	7.88E-02	0.00E+00	9.34E-01	-4.53E-02
	Climate Change (fossil) [kg CO2 eq.]	2.66E+00	2.16E-01	1.22E-01	0	0	0	0	0	0	0	5.02E-02	7.73E-02	0.00E+00	1.07E-01	-4.75E-02
	Climate Change (biogenic) [kg CO2 eq.]	-7.87E-01	5.94E-04	2.46E-01	0	0	0	0	0	0	0	4.05E-06	2.13E-04	0.00E+00	8.28E-01	1.73E-03
	Climate Change (land use change) [kg CO2 eq.]	7.64E-03	3.57E-03	3.45E-04	0	0	0	0	0	0	0	4.36E-06	1.28E-03	0.00E+00	1.49E-04	5.48E-04
	Ozone depletion [kg CFC-11 eq.]	2.54E-05	2.14E-14	5.08E-07	0	0	0	0	0	0	0	7.68E-10	7.67E-15	0.00E+00	2.05E-09	3.58E-09
	Acidification terrestrial and freshwater [Mole of H+ eq.]	5.55E-03	2.35E-04	3.01E-04	0	0	0	0	0	0	0	4.53E-04	8.45E-05	0.00E+00	7.06E-04	4.75E-04
	Eutrophication freshwater [kg P eq.]	2.43E-05	9.06E-07	2.50E-06	0	0	0	0	0	0	0	1.77E-07	3.25E-07	0.00E+00	3.28E-06	1.14E-05
	Eutrophication marine [kg N eq.]	1.51E-03	8.03E-05	8.84E-05	0	0	0	0	0	0	0	2.10E-04	2.88E-05	0.00E+00	2.83E-04	9.89E-05
	Eutrophication terrestrial [Mole of N eq.]	1.53E-02	9.51E-04	8.58E-04	0	0	0	0	0	0	0	2.30E-03	3.41E-04	0.00E+00	2.76E-03	9.06E-04
	Photochemical ozone formation - human health [kg NMVOC eq.]	4.35E-03	2.26E-04	2.56E-04	0	0	0	0	0	0	0	6.86E-04	8.11E-05	0.00E+00	1.07E-03	6.03E-04
	Resource use, mineral and metals [kg Sb eq.] ¹	3.82E-06	1.81E-08	1.01E-06	0	0	0	0	0	0	0	1.79E-08	6.48E-09	0.00E+00	1.13E-07	6.60E-07
	Resource use, energy carriers [MJ] ¹	4.11E+01	2.77E+00	1.67E+00	0	0	0	0	0	0	0	6.51E-01	9.94E-01	0.00E+00	2.24E+00	-2.28E-01
	Water deprivation potential [m³ world equiv.] ¹	1.48E+00	3.16E-03	6.55E-02	0	0	0	0	0	0	0	2.02E-03	1.13E-03	0.00E+00	8.09E-02	1.02E-01

¹ The results of this environmental impact indicator shall be used with care as the uncertainties on these results are high or as there is limited experienced with the indicator

Resource Use

Resources Use indicators	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE LIFE CYCLE
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
 Use of renewable primary energy (PERE) [MJ] ²	1.61E+01	2.34E-01	2.77E+00	0	0	0	0	0	0	0	4.04E-03	8.40E-02	0.00E+00	7.94E-02	1.73E+00
 Primary energy resources used as raw materials (PERM) [MJ] ²	7.82E+00	0.00E+00	-1.99E+00	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Total use of renewable primary energy resources (PERT) [MJ] ²	2.39E+01	2.34E-01	7.77E-01	0	0	0	0	0	0	0	4.04E-03	8.40E-02	0.00E+00	7.94E-02	1.73E+00
 Use of non-renewable primary energy (PENRE) [MJ] ²	4.03E+01	2.77E+00	1.66E+00	0	0	0	0	0	0	0	6.51E-01	9.94E-01	0.00E+00	2.24E+00	-2.28E-01
 Non-renewable primary energy resources used as raw materials (PENRM) [MJ] ²	8.13E-01	0.00E+00	3.05E-02	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Total use of non-renewable primary energy resources (PENRT) [MJ] ²	4.11E+01	2.77E+00	1.69E+00	0	0	0	0	0	0	0	6.51E-01	9.94E-01	0.00E+00	2.24E+00	-2.28E-01
 Use of secondary material (SM) [kg]	3.27E-01	0.00E+00	6.53E-03	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Use of renewable secondary fuels (RSF) [MJ]	0.00E+00	0.00E+00	0.00E+00	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Use of non-renewable secondary fuels (NRSF) [MJ]	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
 Use of net fresh water (FW) [m3]	3.62E-02	2.63E-04	1.63E-03	0	0	0	0	0	0	0	4.70E-05	9.43E-05	0.00E+00	1.91E-03	8.26E-04

² From EPD International Construction Product PCR 2.0 (Annex 3). The option B was retained to calculate the primary energy use indicators.

Waste Category & Output flows

Waste Category & Output Flows	PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				BENEFITS AND LOADS BEYOND THE LIFE CYCLE
	A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
 Hazardous waste disposed (HWD) [kg]	2.30E-01	8.96E-11	4.69E-03	0	0	0	0	0	0	0	5.69E-04	3.21E-11	0.00E+00	1.30E-03	9.35E-03
 Non-hazardous waste disposed (NHWD) [kg]	7.92E-01	4.31E-04	2.75E-01	0	0	0	0	0	0	0	4.39E-03	1.55E-04	0.00E+00	1.25E+01	9.79E-02
 Radioactive waste disposed (RWD) [kg]	1.43E-04	3.58E-06	1.52E-05	0	0	0	0	0	0	0	7.22E-08	1.28E-06	0.00E+00	6.04E-06	-6.66E-05
 Components for re-use (CRU) [kg]	0.00E+00	0.00E+00	1.44E-01	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Materials for Recycling (MFR) [kg]	0	0.00E+00	0.00E+00	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Material for Energy Recovery (MER) [kg]	0	0.00E+00	0.00E+00	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Exported electrical energy (EEE) [MJ]	0	0.00E+00	0.00E+00	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
 Exported thermal energy (EET) [MJ]	0	0.00E+00	0.00E+00	0	0	0	0	0	0	0	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Additional voluntary indicators from EN 15804

		PRODUCT STAGE	CONSTRUCTION STAGE		USE STAGE							END OF LIFE STAGE				REUSE, RECOVERY RECYCLING
Environmental indicators		A1 / A2 / A3	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Operational energy use	B7 Operational water use	C1 Deconstruction / demolition	C2 Transport	C3 Waste processing	C4 Disposal	D Reuse, recovery, recycling
	GWP-GHG [kg CO2 eq.]³	2.68E+00	2.20E-01	1.34E-01	0	0	0	0	0	0	0	5.02E-02	7.88E-02	0.00E+00	4.17E-01	-4.53E-02

Information on biogenic carbon content

		PRODUCT STAGE
Biogenic Carbon Content		A1 / A2 / A3
	Biogenic carbon content in product [kg]	1.53E-01
	Biogenic carbon content in packaging [kg]	6.73E-02

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂. The product contains biogenic carbon due to the additives and paper liner used. Regarding packaging, biogenic carbon is quantified due to wooden pallets production.

³ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Declaration of variation

Variation between sites

Single site production.

Variations between products

Single product report.

Additional environmental information:

Electricity information

The factory based in Mátra, Halmajugra, Hungary uses electricity with Guarantee of Origin certificate (GO).

Hence, the electricity mix considered for the manufacturing of the studied product is modelled according to the electricity mix described in the Guarantee of Origin certificate. The amount of electricity purchased with GO's covers 100% of the electricity consumption on the manufacturing site.

Type of information	Description
Location	Representative of the guarantee of origin purchased by Saint-Gobain
Share of electricity covered by Guarantee of Origin	100% of the energy consumption is covered by the GO Photovoltaic 100%
Dataset version	Sphera CUP2024.2 ecoinvent 3.10 (medium voltage)
Type of dataset	Cradle to gate from Sphera and ecoinvent databases
Source of electricity mix	Sphera/ecoinvent
GHG-GWP CO₂ eq.	0.031 kg of CO ₂ eq/kWh

An EPD is valid for 5 years. Therefore, the GO will be prolonged continuously to be valid for the whole validity of the EPD. If not prolonged, the EPD will be updated.

Other additional environmental information

No additional information displayed.

Additional social and economic information

No additional information displayed.

Version history

Original version.

Abbreviations

AIB	Association of issuing bodies
DU	Declared unit
EPD	Environmental Product Declaration
eq.	equivalents
FU	Functional unit
g	gram
GJ	Giga Joules (as Net Calorific Value)
GWP-GHG	Global Warming Potential - Greenhouse gas
IOBC	Instantaneous Oxidation of Biogenic Carbon
EF	Environmental Footprint
GO's	Guaranty of origin
kg	kilogram

kWh	kilowatt-hour
L	liter
LCA	Life Cycle Assessment
LCI	Life Cycle Inventory Analysis
LCIA	Life Cycle Impact Assessment
MJ	Mega Joules (as Net Calorific Value)
PCR	Product Category Rules
RSL	Reference Service Life (in years)
ton	metric ton

References

1. ISO 14040:2006 Environmental Management-Life Cycle Assessment-Principles and framework.
2. ISO 14044:2006 Environmental Management-Life Cycle Assessment-Requirements and guidelines.
3. EN 15804:2012+A1:2013 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
4. EN 15804:2012+A2:2019/AC:2021 - Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products
5. EPD International. General Program Instructions (GPI) for the International EPD® System (version 5.0.1) www.environdec.com.
6. The International EPD System PCR 2019:14 Construction products and Construction services. Version 2.0.1
7. EN 15941 Sustainability of construction works - Data quality for environmental assessment of products and construction work - Selection and use of data
8. c-PCR Gypsum-based construction products (EN 17328) (c-PCR-031 version: 2024-08-06)
9. European Chemical Agency, Candidate List of substances of very high concern for Authorization. <https://echa.europa.eu/candidate-list-table>
10. 2025.1.4 Gypsum_LCA report template (PCR 2.0.1 EPD Int. System) Plasterboards HU2026

Version history

Original version of the EPD, 2026-04-14